




**Ratings Range**

|                 |            |              |
|-----------------|------------|--------------|
|                 |            | <b>60 Hz</b> |
| <b>Standby:</b> | <b>kW</b>  | 92-130       |
|                 | <b>kVA</b> | 92-163       |
| <b>Prime:</b>   | <b>kW</b>  | 83-115       |
|                 | <b>kVA</b> | 83-144       |

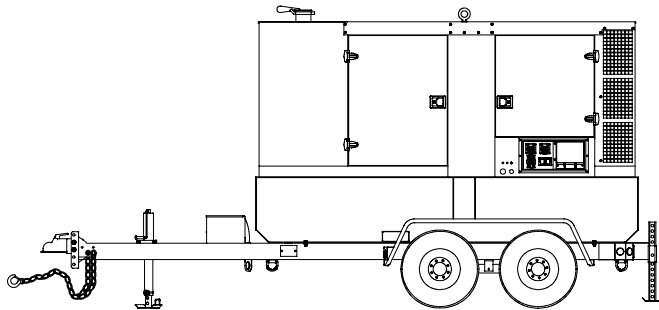

**Industrial Towable Generator Sets**

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- A one-year limited warranty covers all systems and components.
- Generator sets are available with and without trailers.
- Generator set features:
  - Durable galvanized steel, sound-attenuating housing.
  - Electrical power panel.
  - Unit-mounted radiator with 50°C (122°F) ambient air capability with prime rating.
  - Skid and vibration isolators.
  - Main line circuit breaker, 400 amps.
  - Microprocessor controller with emergency stop switch.
  - Externally mounted, recessed emergency stop switch.
  - Lockable generator output voltage selector switch wired for 277/480 V 3 phase, 120/208 V 3 phase, and 120/240 V 1 phase.
  - Generator set and trailer operation literature.
- Engine features:
  - John Deere engine with 12-volt battery charging alternator.
  - Heavy-duty air cleaner with air restrictor indicator.
  - Battery, battery rack, and cables.
  - Engine is compliant with the Environmental Protection Agency (EPA) requirements.
  - Water separator fuel filter.
  - Battery disconnect switch.
  - Block heater, 120 V/1800 W.
- Enclosure/fuel tank package features:
  - Quiet operation, 71 dB(A) @ 7 m (23 ft.) (full load).
  - Lockable housing doors.
  - Subbase fuel tank, 868 L (229 gal.).
  - 110% environmental containment basin for fuel, oil, and coolant.
- Trailer features:
  - 2 5/16 in. ball hitch coupler with adaptability for an optional Lunette eye.
  - Lockable utility tool box.
  - Running lights with 7-wire harness and connector.
  - Dual-axle trailer with electric brake system including breakaway and battery backup. 2722 kg (6000 lb.) rating per axle.
  - 15 x 6, 6-bolt steel wheels and ST225/75R15 LRD tires with 1152 kg (2540 lb.) load rating.
  - Rear stabilizer trailer jacks.

**Generator Set Ratings**

| Alternator | Voltage | Ph | Hz | Standby Rating |      | Prime Rating |      |
|------------|---------|----|----|----------------|------|--------------|------|
|            |         |    |    | kW/kVA         | Amps | kW/kVA       | Amps |
|            | 120/208 | 3  | 60 | 120/150        | 416  | 110/138      | 382  |
| LSA442S7   | 120/240 | 1  | 60 | 92/92          | 383  | 83/83        | 346  |
|            | 277/480 | 3  | 60 | 130/163        | 195  | 115/144      | 173  |

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. *Standby Ratings:* The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. *Prime Power Ratings:* At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

# Alternator Specifications

- NEMA-MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards compliance for temperature rise and motor starting.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

| Specifications                              | Alternator             |
|---|------------------------|
| Manufacturer                                | Leroy Somer            |
| Type  | 4-Pole, Rotating-Field |
| Exciter type                                | Shunt                  |
| Leads: quantity, type                       | 12, Reconnectable      |
| Voltage regulator                           | Solid State, R230      |
| Insulation:                                 | NEMA MG1               |
| Material                                    | Class H                |
| Bearing: quantity, type                     | 1, Sealed              |
| Coupling                                    | Direct                 |
| Voltage regulation, no-load to full-load    | ±1%                    |
| Direct axis subtransient reactance (X"d), % | 7.9                    |

## Application Data

### Engine

| Engine Specifications                      |                        |
|--|------------------------|
| Manufacturer                               | John Deere             |
| Engine model                               | 6068HFS82              |
| Engine type                                | 4-Cycle, Turbocharged  |
| Cylinder arrangement                       | 6 Inline               |
| Displacement, L (cu. in.)                  | 6.8 (415)              |
| Bore and stroke, mm (in.)                  | 106 x 127 (4.2 x 5.0)  |
| Compression ratio                          | 19:1                   |
| Piston speed, m/min. (ft./min.)            | 457 (1500)             |
| Rated rpm                                  | 1800                   |
| Max. power at rated rpm, kWm (BHP)         | 147 (197)              |
| Valve material:                            |                        |
| Intake                                     | Chromium-Silicon Steel |
| Exhaust                                    | Stainless Steel        |
| Governor type                              | Electronic             |
| Frequency regulation, no-load to full-load | ISO 5%                 |
| Frequency regulation, steady state         | ±2.5%                  |
| Air cleaner type, all models               | Dry                    |

### Engine Electrical

| Engine Electrical System                       |          |
|--|----------|
| Battery charging alternator:                   |          |
| Ground (negative/positive)                     | Negative |
| Volts (DC)                                     | 12       |
| Starter motor rated voltage (DC)               | 12       |
| Battery, recommended cold cranking amps (CCA): |          |
| Quantity, CCA rating each                      | One, 680 |
| Battery voltage (DC)                           | 12       |

### Fuel

| Fuel System                  |             |
|------------------------------|-------------|
| Max. fuel flow, Lph (gph)    | 89.8 (23.7) |
| Fuel prime pump              | Manual      |
| Recommended fuel             | #2 Diesel   |
| Fuel tank capacity, L (gal.) | 868 (229)   |

### Lubrication

| Lubricating System                    |               |
|---------------------------------------|---------------|
| Type                                  | Full Pressure |
| Oil pan capacity, L (qt.)             | 32 (34)       |
| Oil pan capacity with filter, L (qt.) | 33 (34.9)     |

## Application Data

### Operation Requirements

| Fuel Consumption            |              |
|-----------------------------|--------------|
| Diesel, Lph (gph) at % load | Prime Rating |
| 100% (of the prime rating)  | 33.74 (8.9)  |
| 75% (of the prime rating)   | 29.41 (7.8)  |
| 50% (of the prime rating)   | 21.76 (5.7)  |

## Controllers



### Decision-Maker® 1000

#### Standard Features

- LCD display panel
- User buttons for start, stop, and menu scroll and selection
- Emergency stop button
- On/off key switch
- LED indication for status
- Panel-mounted battery fuse
- Panel lights

#### LCD Panel Features

- Three lines of text and graphic display
- Icons for quick identification of system status

#### Functions

- View and adjust system operation parameters
- View system faults

#### Viewable/Selectable Parameters (may require optional module)

- Mode of operation
- Battery voltage
- Frequency
- Time delay countdown
- Hourmeter
- Engine speed
- Fuel level (%)
- Coolant temperature
- Oil pressure
- Voltage: phase, phase-to-neutral, total voltage
- Current


#### Viewable Faults

- Overspeed
- Overcrank
- Low fuel level
- Coolant temperature
- Oil pressure
- Battery charger
- Frequency meter, ammeter, voltmeter
- Emergency stop

## Distribution Panel

### Receptacles

- Two 20-amp 120 V, 1 phase, GFCI duplex
- Two 50-amp 120/240 V twistlock (shore power)
- Individual receptacle circuit breakers

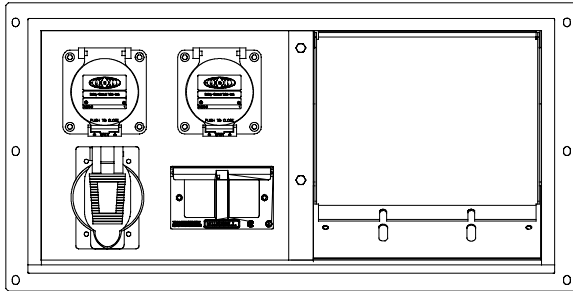

### Bus Bar Connection

- Main bus connection studs enclosed behind a lockable access door for easy access and operator safety
- Strain relief to prevent cables from being pulled free from bus connections




## Available Accessories


- Battery Charger, Equalize/Float Type
- Bottle Jack
- Cable Rack (bolt on)
- Fire Extinguisher
- Lunette Eye
- Remote Start Connections
- Spare Tire
- Trailer (includes utility tool box)

### Dimensions and Weights

Overall Size, L x W x H, mm (in.): 3560 x 1180 x 2202  
 (140.16 x 46.46 x 86.71)  
 Weight, wet, kg (lb.): 3510 (7738)

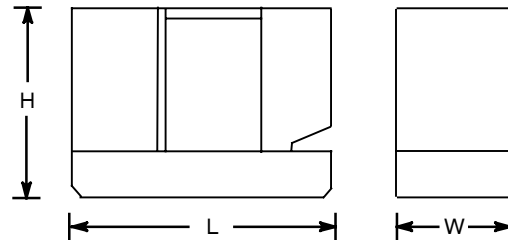

Overall Size, L x W x H, mm (in.): 5315 x 2011 x 2811  
 (209.24 x 79.16 x 100.66)  
 Weight, wet, kg (lb.): 4621 (10188)

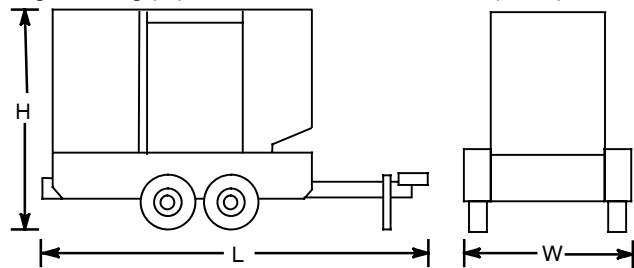

**Note:** This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

**DISTRIBUTED BY:**